
## NAVIGATOR CLASS - PRINTED CIRCUIT MOUNT, LOW PROFILE POWER TRANSFORMER



Secondary Schematics

- 1. Electrical Specifications
  - A. Maximum Power: 48VA
  - B. Input Voltage and Frequency: 115/230V, 50/60Hz
  - C. Voltage Regulation: 18% TYP, Full Load to No Load
  - D. Temperature Rise: 50°C TYP
  - E. Insulation Resistance: < 1MEG ohm
  - F. Hi-Pot: 2500 Vrms 1 minute
- 2. Marking: Ensign Corp, part number (see table), date code, terminal numbers
- 3. Agency Approval:

UL/cUL 5085-2 Recognized (File 47299)
UL 1446 Recognized Insulation System (File 95662)

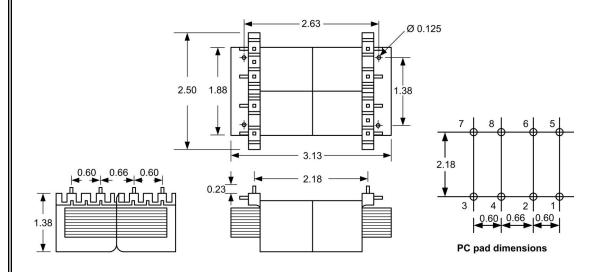

	occomunity continues
	5 5 6 6 7 E 8 8
Dual Input (Specify 115/230V or 120/240V)	<b>Dual Output</b>

**Primary Schematics** 

	_	
Part Number		
115/230V	Series Connection	Parallel Connection
U048-2-010X	10VCT @ 4.8A	5V @ 9.6A
U048-2-012X	12.6VCT @ 3.8A	6.3V @ 7.6A
U048-2-016X	16VCT @ 3.0A	8V @ 6.0A
U048-2-020X	20VCT @ 2.4A	10V @ 4.8A
U048-2-024X	24VCT @ 2.0A	12V @ 4.0A
U048-2-030X	30VCT @ 1.6A	15V @ 3.2A
U048-2-034X	34VCT @ 1.4A	17V @ 2.8A
U048-2-040X	40VCT @ 1.2A	20V @ 2.4A
U048-2-056X	56VCT @ 850mA	28V @ 1.7A
U048-2-088X	88VCT @ 550mA	44V @ 1100 mA
U048-2-120X	120VCT @ 400mA	60V @ 800mA
U048-2-230X	230VCT @ 200mA	115V @ 400mA

THE FLAGSHIP OF CUSTOM MAGNETICS SINCE 1939	POWER TRANSFORMER NAVIGATOR CLASS	U048-2-XXXX	
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	Ensign Corporation 201 ENSIGN RD., BELLEVUE, IA 52031	Dim: Inches	Sheet 1 of 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH ENSIGN RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING